



CLOCKWISE ROTATION
(FAN BLOWING IN OBSERVER'S FACE)
STANDARD RIGHT HAND FAN

NOTE 1:
MAXIMUM FAN DIAMETER (BLADES
HORIZONTAL - AS SHIPPED) EQUALS
NOMINAL FAN DIAMETER. ADJUSTMENT
OF ±1.5 INCHES* POSSIBLE AT
INSTALLATION *BLADES WITH ATEX TIPS
HAVE ADJUSTMENT OF -1.0"
& +2.0 ON DIAMETER"

FAN THROAT

AIRFLOW NEAREST FAN OBSTRUCTION

NEAREST FAN OBSTRUCTION

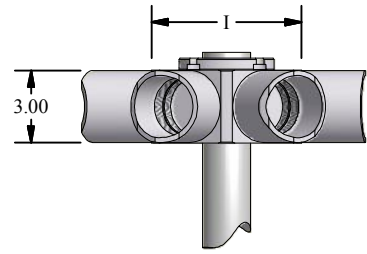

- A = BLADE TIP THICKNESS @ 19° BLADE ANGLE
- B = RUNNING POSITION OF BLADES
- C = MAXIMUM DROOP POSITION OF BLADES
- D = MINIMUM OBSTACLE CLEARANCE AT INLET
- F = CENTERLINE OF FAN TO BASE OF BUSHING
- G = BUSHING OVERALL HEIGHT
- H = MINIMUM OBSTACLE CLEARANCE AT OUTLET
- I = NOMINAL MECHANICAL HUB DIAMETER
- L = MAX. BUSHING TORQUE FT. LBS.
- # = WITH S.A.E. STANDARD SQUARE KEYWAY
- * = WITH SHALLOW KEYWAY IN BUSHING
- ° = MAX METRIC BORE WITH STANDARD KEYWAY

BUSHING AND/OR AIR SEAL
CAN BE INSTALLED ON INLET
OR OUTLET SIDE OF FAN

WITH FAN OPERATING
AT 12000 FT: MINUTE
BLADE TIP SPEED
PERCENT BLADE
LOADING

DIA	100%		75%		C	D	H
	A	B	A	B			
11'	2.2"	3.4"	2.8"	4.5"	2.0"	7.0"	
12'	2.1"	4.3"	3.5"	5.8"	2.0"	7.0"	
13'	1.9"	5.1"	4.1"	7.1"	2.0"	7.0"	
14'	1.8"	6.0"	4.8"	8.5"	2.0"	7.0"	
15'	1.7"	7.0"	5.6"	10.0"	2.0"	7.0"	
16'	1.5"	8.1"	6.4"	11.6"	2.0"	7.0"	
17'	1.4"	9.2"	7.2"	13.3"	2.0"	7.0"	
18'	1.3"	10.4"	8.1"	15.1"	2.0"	7.0"	
19'	1.2"	11.7"	9.0"	16.9"	2.0"	7.0"	
20'	1.1"	13.0"	10.1"	18.9"	2.0"	7.0"	
21'	1.0"	14.4"	11.1"	21.0"	2.0"	7.0"	
22'	0.9"	15.9"	12.2"	23.2"	2.0"	7.0"	
23'	0.8"	17.4"	13.4"	25.5"	2.0"	7.0"	
24'	0.7"	19.1"	14.7"	27.9"	2.0"	7.0"	

MAX BLADES	BUSHING TYPE	MAX # BORE	MAX * BORE	MAX ° BORE	I	F	G	L
6	U	2.750"	2.938"	75	7"	2.0"	2.7"	4000
8	U	2.750"	2.938"	75	9"	2.0"	2.7"	4000
12	U	2.750"	2.938"	75	12"	2.0"	2.7"	4000
14	U	2.750"	2.938"	75	14"	2.0"	2.7"	4000
8	W	3.750"	4.000"	100	9"	2.2"	2.8"	7300
12	W	3.750"	4.000"	100	12"	2.2"	2.8"	7300
14	W	3.750"	4.000"	100	14"	2.2"	2.8"	7300
16	W	3.750"	4.000"	100	16"	2.2"	2.8"	7300
8	X	3.750"	4.000"	100	9"	2.2"	4.0"	9800
12	X	3.750"	4.000"	100	12"	2.2"	4.0"	9800
14	X	3.750"	4.000"	100	14"	2.2"	4.0"	9800
16	X	3.750"	4.000"	100	16"	2.2"	4.0"	9800
12	Z	5.000"	5.500"	140	12"	2.2"	4.0"	18000
14	Z	5.000"	5.500"	140	14"	2.2"	4.0"	18000
16	Z	5.000"	5.500"	140	16"	2.2"	4.0"	18000



SERIES 72 STANDARD HUB HD FAN RIGHT HAND ROTATION