


# CLASS 1000 SERIES 10

## LH ROTATION

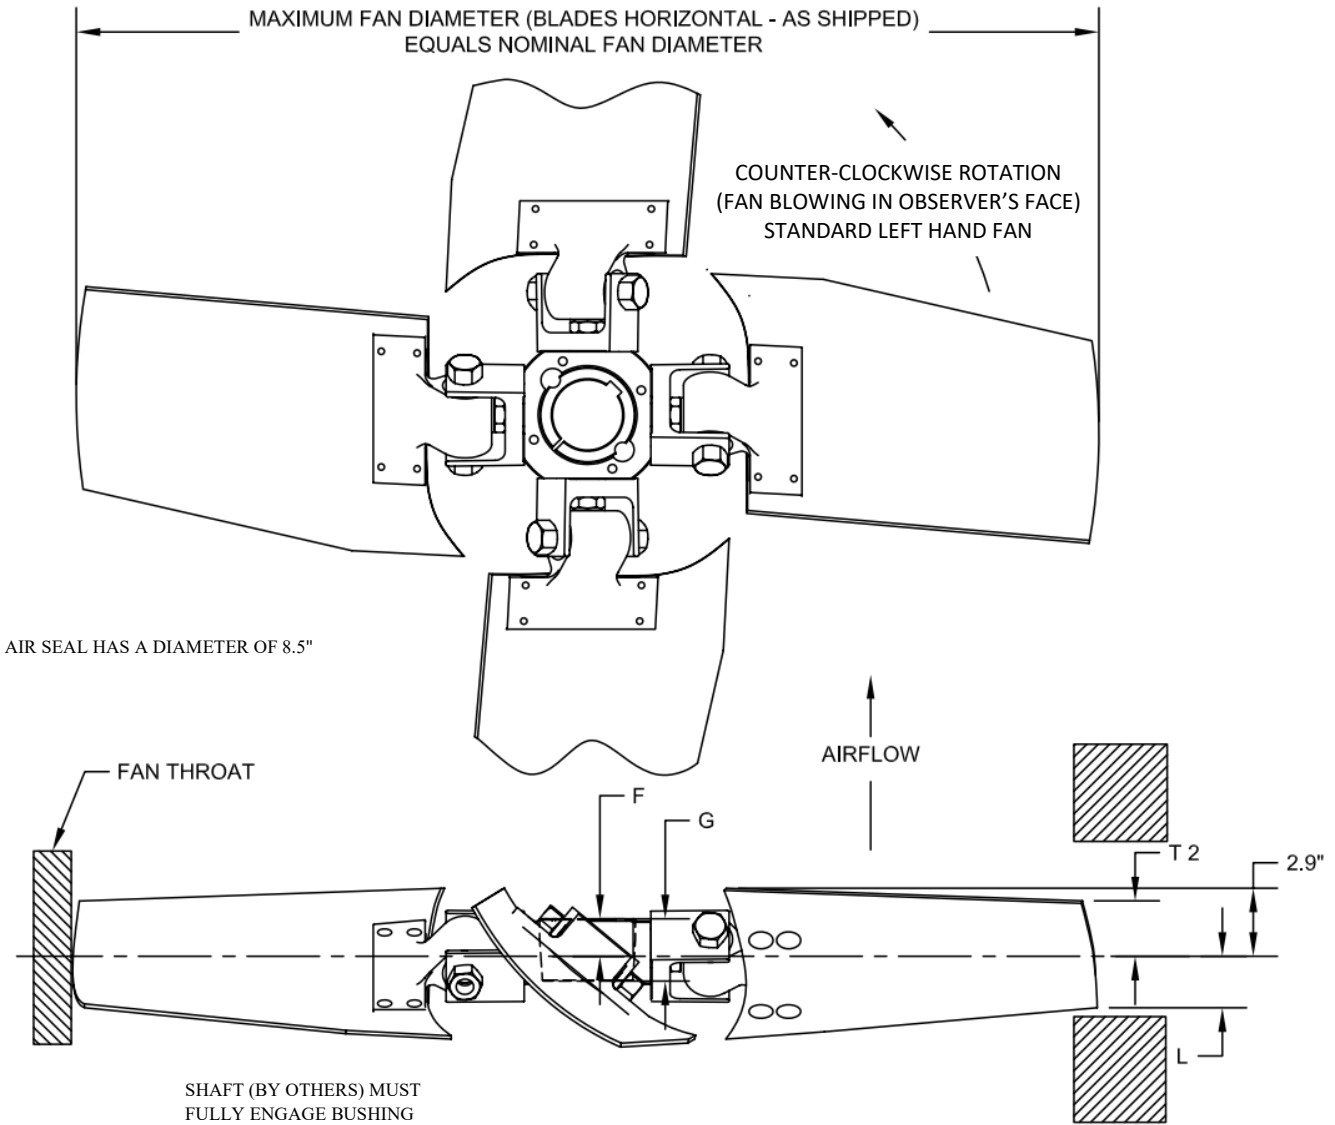

SHAFT (BY OTHERS) MUST FULLY ENGAGE BUSHING

WITH FAN OPERATING AT 12000 FT/MINUTE BLADE TIP SPEED		
PERCENT BLADE LOADING		
	100%	

DIA	T2	L
24"	2.6"	3.0"
30"	1.9"	3.2"
32"	1.7"	3.2"
36"	1.4"	3.3"
42"	0.9"	3.4"
48"	0.1"	3.8"

**NOTES:**

ALL MEASUREMENTS ASSUME HIGHEST BLADE LOADING ANGLE (50°)

FAN SHOWN WITHOUT AIRSEAL FOR CLARITY

T2= FAN CENTER LINE TO TRAILING EDGE AT TIP

F = CENTERLINE OF FAN TO BASE OF BUSHING (STANDARD HUB)

G = OVERALL BUSHING LENGTH

L = FAN CENTER LINE TO LEADING EDGE AT TIP

# = WITH S.A.E. STANDARD SQUARE KEYWAY

\* = WITH SHALLOW KEYWAY IN BUSHING

MAX BLADES	BUSHING TYPE	MAX # BORE	MAX * BORE	F	G
4	T	2.000"	2.188"	1.3"	1.9"